

falcon 275




Manual sawing machine to cut metals from 45° right up to 45° left using an HSS blade. This high performance model has a heavy cast iron structure and is equipped with all the devices and functions necessary so as to cut in a precise and safe manner. The FALCON 275 is available as a bench model or eventually with the steel base which is an optional. Furthermore it can be supplied with three-phase motor at one or two speeds, or in the single-phase version.

A FEW FEATURES:

- Electric panel (wiring totally identifiable, stand-by, main lockable disconnect switch, pole change switch, emergency stop, motor magneto thermal overload, minimum tension coil, protection against missing phase, low tension safety device 24V)
- Blade shaft assembled on spheroidal cast iron eccentric bushing.
- Bronze gear mounted with key and ring nut so as to grant the maximum hold
- Worm screw shaft mounted on a pair of bearings.
- Clamping system by means of vice screw which

									Ø				Ø			
									0°	275	80	70	100x60	225	40	
									15°	275	70	60	70x60	225		28x40
mm	kw	giri/min	kw	giri/min	kw	giri/min	mm		15°	275	70	60	70x60	225		28x40
275x32x2,5	1,5/1,8	45/90	0,9	45	0,75	45	105									kg
																115

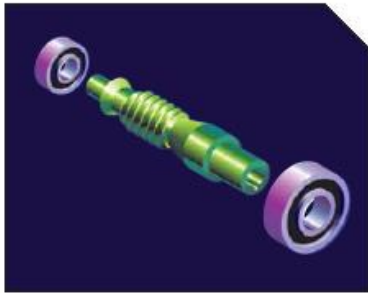

- slides on taper slide with adjustable gib.
- Adjustable steel anti-burr device.
- Electric submerged pump at 48V to lubro-refrigerate blade.
- Double head return spring.

ZUBEHÖR - OPTIONALS

